

Model LT Pneumatic System Operation and Set-up

The Diagram below shows how to set up a Model LT pull cable extinguisher to a 2nd pneumatically activated extinguisher.


The pneumatic activation line can be either a hard line or flexible # 4 AN style hose.

DO NOT "T" the pneumatic activation line off a discharge line.

Install the pull cable for the manual discharge extinguisher as shown in the Model LT Install Guidelines.

Blue nozzle to driver.
1 required, run this nozzle
off of pull cable bottle

Pneumatic activation line to top of
pneumatic head
**DEDICATED LINE – DO NOT "T"
OFF ANOTHER LINE**

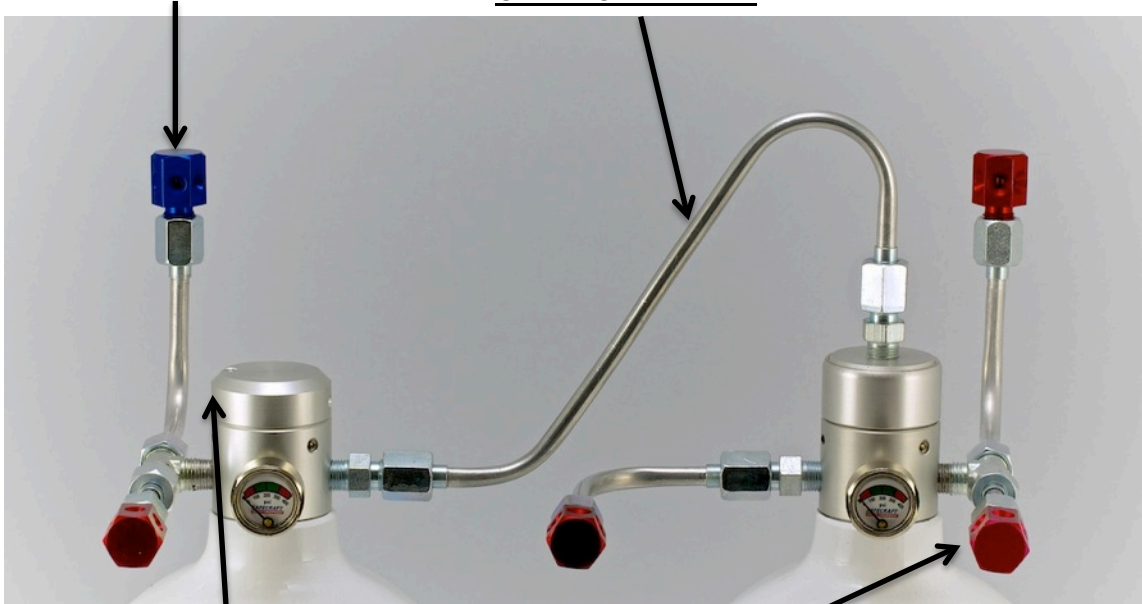

Pull cable receptacle.
See Model LT Install
instructions

Red Nozzles, run 4 to
engine compartment



Model LT10



Model LT Pneumatic Head



Model LT Family

CALIFORNIA (HEADQUARTERS)

5165-C Commercial Circle, Concord, CA 94520
Phone: 800-400-2259 Fax: 925-405-0311
email: info@safecraft.com

NORTH CAROLINA (REPAIR FACILITY)

5980 Grand National Lane, Concord, NC 28027
Phone: 704-455-9422

NO WARRANTIES, EXPRESSED OR IMPLIED ARE MADE FOR THE SUITABILITY OF THIS PRODUCT FOR ANY PURPOSE. NO WARRANTY OR REPRESENTATION IS MADE AS TO THIS PRODUCTS ABILITY TO PROTECT THE USER FROM ANY INJURY OR DEATH. THE END USER MUST DETERMINE THE SUITABILITY OF THIS PRODUCT FOR THEIR APPLICATION.



Please Visit:

www.safecraft.com

to learn more about our
complete line of
extinguisher systems